


Accessories List for SP01262

Mating Connectors for IP20 Devices (included in delivery)

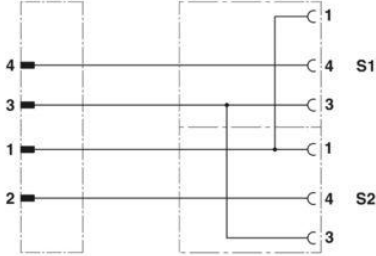
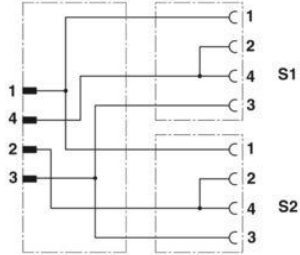
Part Number	Designation	Picture
SP08071	Connector set for SP01262 IP20	
SP08072	Connector set for SP01262 IP20 with STO	
SP08079	Connector set for SP01262 IP20 with Fieldbus	
SP08080	Connector set for SP01262 IP20 with STO and Fieldbus	

Accessories List for SP01262

Mating Connectors for IP54 Devices

Part Number	Designation	Picture
SP08035	Mains connector for SP01262 IP54	
SP08081	Magnet connector for SP01262 IP54	
SP08038	M12 connector, male, 4 pole, A coded, 0.14...0.34mm ²	
SP08039	M12 connector, male, 4 pole, A coded, 0.34...0.75mm ²	

Accessories List for SP01262

Part Number	Designation	Picture
SP08073	M12 connector, female, 4 pole, A coded, 0.14...0.34mm ²	
SP08074	M12 connector, female, 4 pole, A coded, 0.34...0.75mm ²	
SP08045	M12 Y distributor, variant 1, 0.3m	 
SP08047	M12 Y distributor, variant 2, 0.3m	 

Accessories List for SP01262

Plugs / Caps

Part Number	Designation	Picture
SP08048	Screw plug for unoccupied M12 sockets	
SP08049	Sealing cap for unoccupied M12 plugs	

Cables for IP54 Devices

Part Number	Designation	Picture
SP06074-01750	Mains cable with angled Schuko connector (CEE 7/7) for SP01262 IP54, 1.75m	

Cables for PC Interface

Part Number	Designation	Picture
SP06086	USB-A to USB-C cable, 2m	

Accessories List for SP01262

Acceleration Sensors

Part Number	Designation	Picture
SP01144-0001-XXXXX	Sensor SP01144 in M12x45 housing (nickel-plated brass) PVC cable with M12 connector XXXXX = cable length in mm Standard lengths: 2m, 3m, 5m, 10m	
SP01144-0002-XXXXX	Sensor SP01144 in M12x45 housing (nickel-plated brass) PVC cable without connector XXXXX = cable length in mm Standard lengths: 2m, 3m, 5m, 10m	
SP01144-0003-XXXXX	Sensor SP01144 in 40x25x12 housing (stainless steel 1.4301) PVC cable with M12 connector XXXXX = cable length in mm Standard lengths: 2m, 3m, 5m, 10m	
SP01144-0004-XXXXX	Sensor SP01144 in 40x25x12 housing (stainless steel 1.4301) PP-EPDM cable with M12 connector for food industry XXXXX = cable length in mm Standard lengths: 2m, 3m, 5m, 10m	
SP01144-0005-XXXXX	Sensor SP01144 in 40x25x12 housing (stainless steel 1.4301) PVC cable without connector XXXXX = cable length in mm Standard lengths: 2m, 3m, 5m, 10m	
SP01144-0006-XXXXX	Sensor SP01144 in 40x25x12 housing (stainless steel 1.4301) PP-EPDM cable without connector for food industry XXXXX = cable length in mm Standard lengths: 2m, 3m, 5m, 10m	

Accessories List for SP01262

Additional Heat Sink

Part Number	Designation	Picture
SP08082	Additional passive heat sink Dimensions (WxHxD): 65x200x70mm³ Thermal resistance: approx. 1.5K/W Mounting hardware included	